


STEELRITE

STAIR STRINGERS

Steelrite's stringers are fully hot dip galvanised and are available from 1 to 17 treads. Our stringers are designed to go In ground, On concrete or Landing to landing


IN GROUND

In Ground stringers are our standard stringer and most popular. Bolting is required at the top and concreted into a suitable footing at the base.

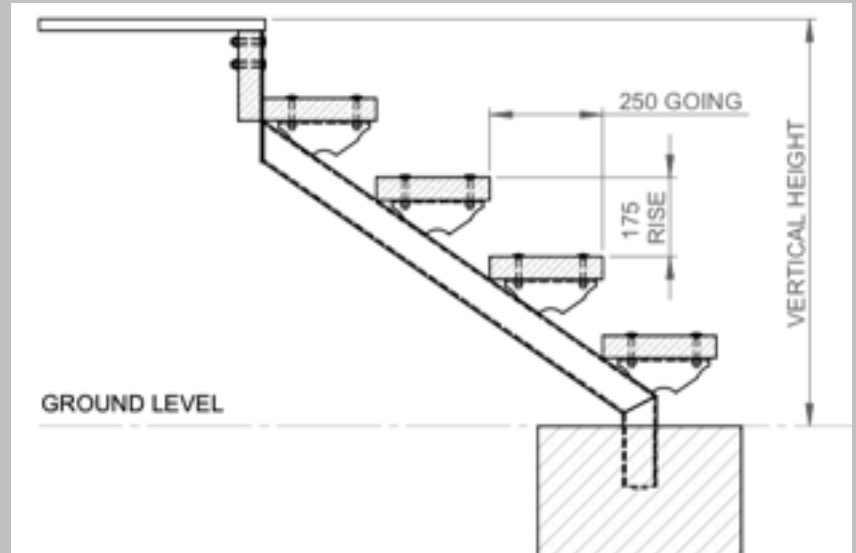

ON CONCRETE

Our On Concrete stringers are a modification to the In Ground stringer. They are bolted at the top and simply cut off excess to the desired length. Drill a hole through stringer and bolt on supplied bracket 1 to each stringer. The stringer can then be anchored to the concrete.

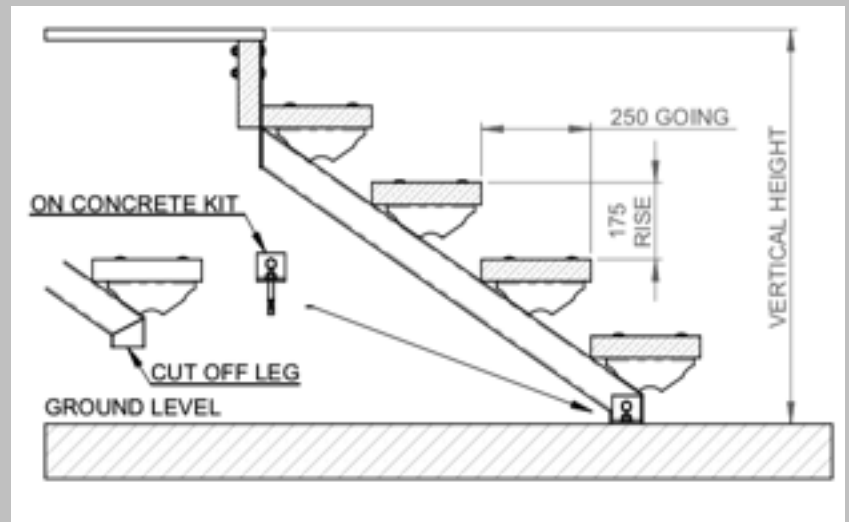

ON CONCRETE KIT (C)

Our stair kit includes.
2 x 65x65x5 Gal Angle Brackets
2 x M12 x 75 Hex head bolts
2 x M12 x 75 True Bolts




LANDING TO LANDING

Our Landing To Landing stringers are modification to our In Ground stringer.

They are bolted at the the top and simply cut off excess to the desired length. Drill a hole through the stringer and bolt on supplied bracket.

Anchor to bottom landing using supplied coach bolts. NOTE: Please allow 1 extra tread for cutting off.

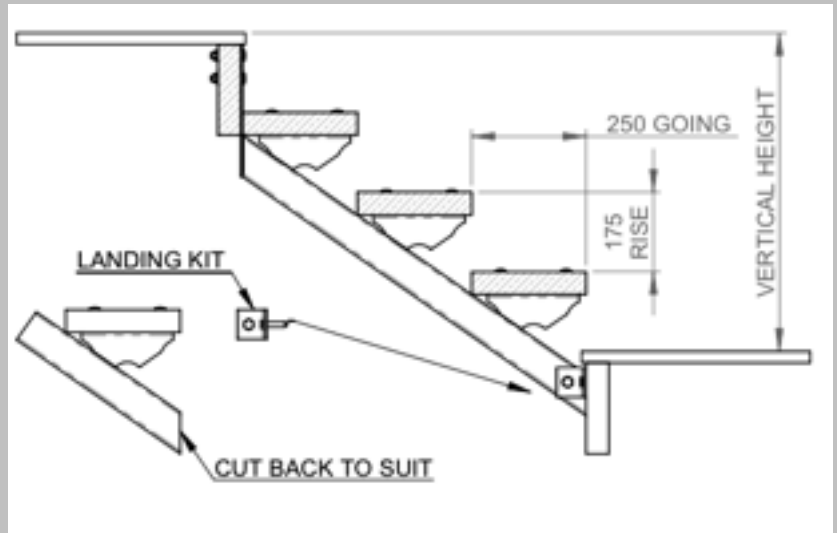


LANDING KIT (L)

Our stair kit includes.

4 x 65x65x5 Gal Angle Brackets

4 x M12 x 65 Coach bolts

2 x M12 x 75 Hex head bolts

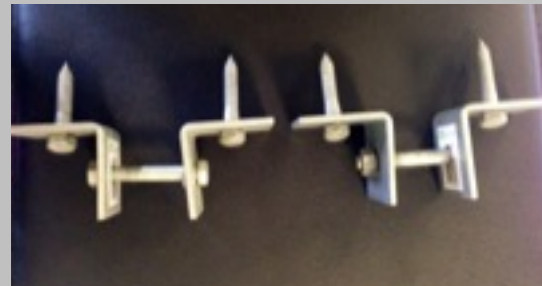

Material & Specifications					
RHS 75x50x2.5		RHS 100x50x3		RHS 150x50x3	
SIZE	WEIGHT KGS	SIZE	WEIGHT KGS	SIZE	WEIGHT KGS
1 Treads	7	7 Treads	42	13 Treads	75
2 Treads	12	8 Treads	47	14 Treads	80
3 Treads	17	9 Treads	53	15 Treads	111
4 Treads	21	10 Treads	58	16 Treads	118
5 Treads	26	11 Treads	64	17 Treads	125
6 Treads	36	12 Treads	69		

TO ORDER CONTACT:

